


**FOR CMYK + WHITE PRINTING ONLY
(NOT FOR CD LABELS OR PMS COLORS)**

NAME:

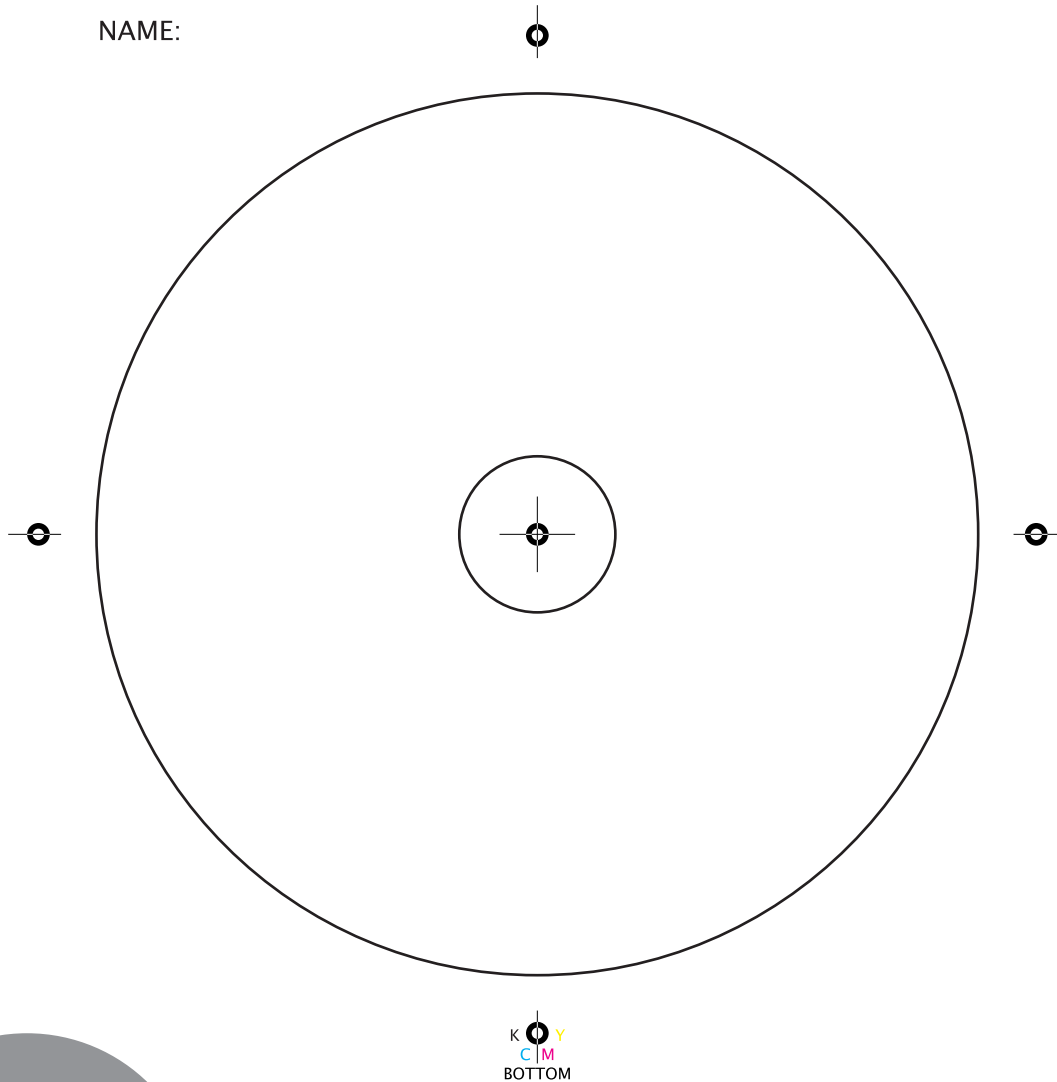

**IMPORTANT
DVD LABEL SPECS**

Deviations from these specs may result in additional charges.

FOR CMYK + WHITE PRINTING ONLY

SENDING US THE JOB...

- You can supply art on disc, or film. **FILM SPECS:** 175 LINE SCREEN, EMULSION DOWN, FILM NEGATIVE
- SCREEN ANGLES: C=75°, M=45°, Y=0°, K=15°
- If supplying film, please provide a color proof of the film.

PRINT AREAS...

Acceptable print areas: Between the two diameters 117mm and 21mm.

DO NOT INCLUDE...

- DO NOT INCLUDE KEYLINES (lines showing the border of a printable area) unless you want them to appear on the finished DVD.
- DO NOT INCLUDE ANY BLEEDS.

TYPE / LINE SIZES...

- LIMITS OF TYPE SIZES: For best results, avoid using very thin or very small type (below 6 pt.), especially if it is to be reversed.
- MINIMUM LINE WIDTH: 1/2 PT. (0.15 mm)
- for REVERSES: 1 PT. (0.30 mm)
- TRAPPING SPECS: 1/2 PT. (0.15 mm)
- MINIMUM EMULSION DENSITY FOR LINE ART: 3.5
- FOR HALFTONES: 4.0

THE COLOR "WHITE"...

- All offset DVD labels will be printed with a white background. Our standard white background covers the entire print area.
- If you want some areas white and some areas the silver of the DVD itself, make a separate document with the white areas 100% of a process color or a PMS color, and include a note on the document. (For example: Magenta=WHITE INK). Make sure the two documents are exactly registered to each other.

K Y
C M
BOTTOM

← SHADED AREA SHOWS ACCEPTABLE PRINT AREA

- Turn on Guides to see template picture boxes.
- Importing a picture into the 117mm circle will crop center hole automatically.

